

# PRAB MON-A-VAC™

PROVEN TO IMPROVE SURFACE FINISH BY AN AVERAGE OF 27%

## Disposable Media Vacuum Filters to Maximize Contaminant Removal

PRAB's Mon-A-Vac™ Vacuum Filters utilize a vacuum chamber to draw dirty coolant through the disposable filter media. They apply the proven principle of optimal filtration through contaminate or sludge build-up, forming a cake on the filter media. Filtration is maximized as caking builds up on the media. Standard vacuum filter units are available with flow rates up to 3,000 GPM. Custom-designed vacuum filters are our specialty.



*"The reason we purchased PRAB's equipment is because it can keep up with production, it is fully automatic, clean, and very user friendly."*

– Gary Sroufe, C&A Tool's multi-spindle "go-to guy"

Mon-A-Vac™ Vacuum Filter

## Top Features & Benefits:

- Automatic indexing of media
- Self-monitoring
- Different grades of media available for choice of fluid clarity
- Standard units available with flows from 25 to 3,000 GPM
- Removes high levels of contamination
- Extends tool life
- Improves surface finish of the component part
- Continuous operation
- Simple maintenance and operation


Backed by the **PRAB Difference**

# PRAB MON-A-VAC™

## CONTINUOUS OPERATION ELIMINATES DOWNTIME

### Mon-A-Vac™ System Operation:

1. Dirty coolant enters the Mon-A-Vac at the tank inlet directly from the machine tool line.
2. A vacuum system draws the dirty coolant through the filter media, causing solids and sludge to build up and cake on the media.
3. Cake buildup on the media causes the vacuum in the vacuum chamber to increase. As this occurs, the filter density and filtration efficiency increase.
4. When the predetermined vacuum is attained, the vacuum break valve opens, bringing coolant from the clean tank into the suction pump. This equalizes pressure across the media, and the flight conveyor automatically indexes, presenting new media and discharging solids and sludge with the dirty media into a hopper.
5. When the vacuum break valve opens, clean coolant from the clean coolant tank is used to feed the machine tool.

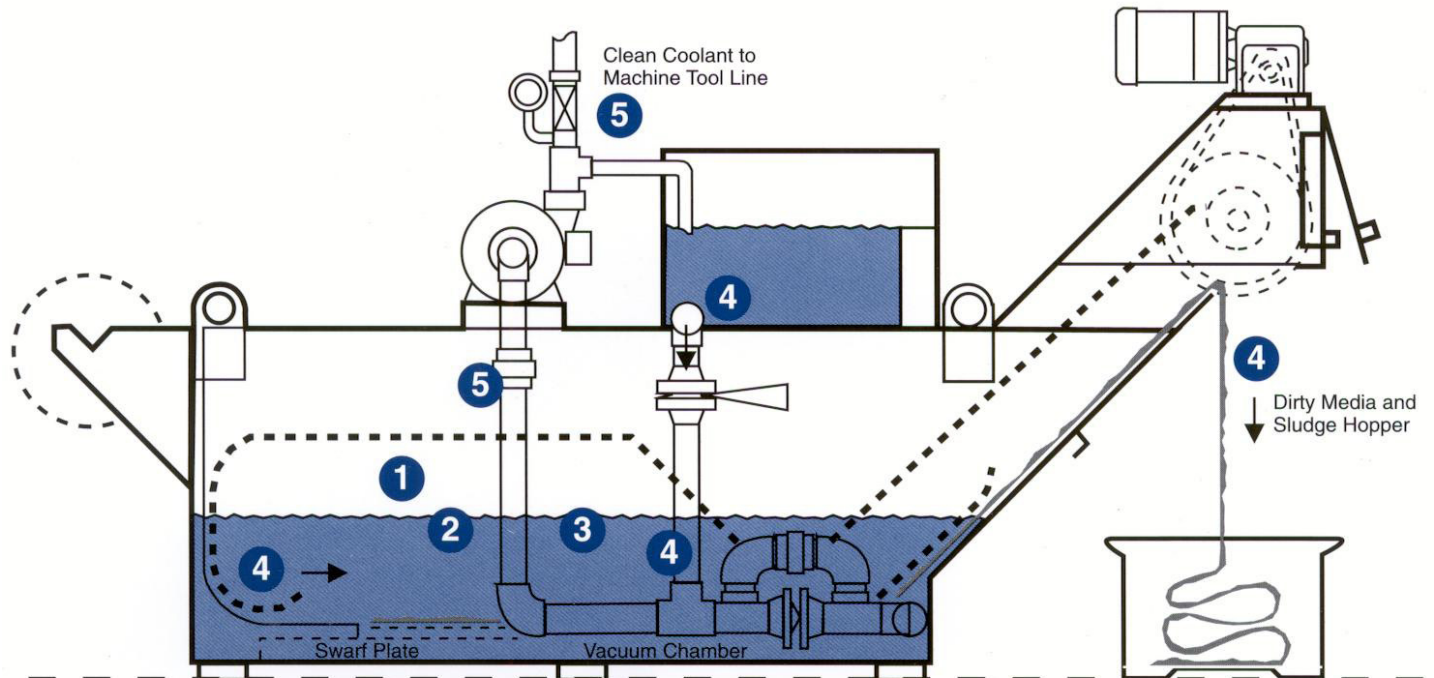

Contact us to **request a quote** today

Phone: 1-800-968-7722 | Email: [sales@prab.com](mailto:sales@prab.com) | Website: [prab.com](http://prab.com)

# PRAB MON-A-VAC™

## MAXIMIZE YOUR CONTAMINANT REMOVAL

### Models and Specifications:

Media Width	Model	A	B	C	D	E	F
38"	VM-9	5'4"	3'8"	2'8"	2'6"	3'0"	8'0"
	VM-12	6'4"	3'8"	2'8"	2'6"	3'0"	9'0"
	VM-15	7'4"	3'8"	2'9"	2'6"	3'0"	10'0"
51"	VM-20	8'4"	4'8"	3'8"	3'0"	4'0"	12'0"
	VM-30	11'2"	4'8"	3'8"	3'0"	4'0"	15'10"
	VM-40	14'0"	4'8"	3'8"	3'0"	4'0"	17'8"
	VM-50	16'11"	4'8"	3'8"	3'0"	4'0"	20'7"
	VM-60	19'9"	4'8"	3'8"	3'0"	4'0"	23'7"
	VM-70	22'8"	4'8"	3'8"	3'0"	4'0"	26'4"
72"	VM-40	10'10"	6'5"	4'8"	4'0"	5'0"	15'6"
	VM-60	14'10"	6'5"	4'8"	4'0"	5'0"	19'6"
	VM-80	18'10"	6'5"	4'8"	4'0"	5'0"	23'6"
	VM-100	22'10"	6'5"	4'8"	4'0"	5'0"	27'6"
	VM-120	26'10"	6'5"	4'8"	4'0"	5'0"	31'6"

All dimensions are approximate and for reference only.

All models are available with an extended discharge ramp for pit installation or adaptation to any size waste hopper.

Options include a two-pump arrangement with piping and valve that allows one pump to operate while the other is on standby.



To receive a free fluid test **contact us** today

Phone: 1-800-968-7722 | Email: sales@prab.com | Website: prab.com



# PRAB MON-A-VAC™

100% PERFORMANCE GUARANTEE

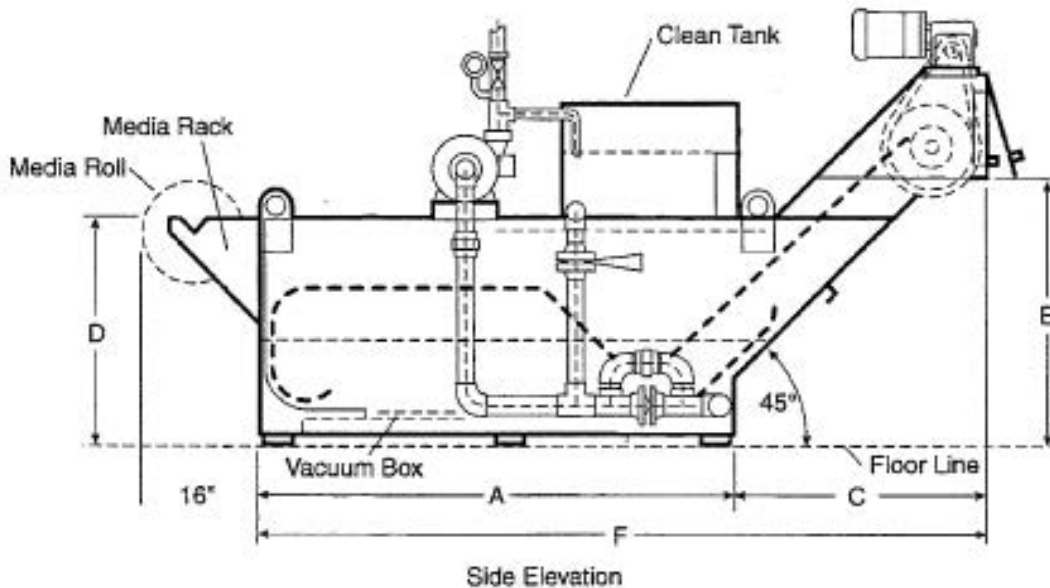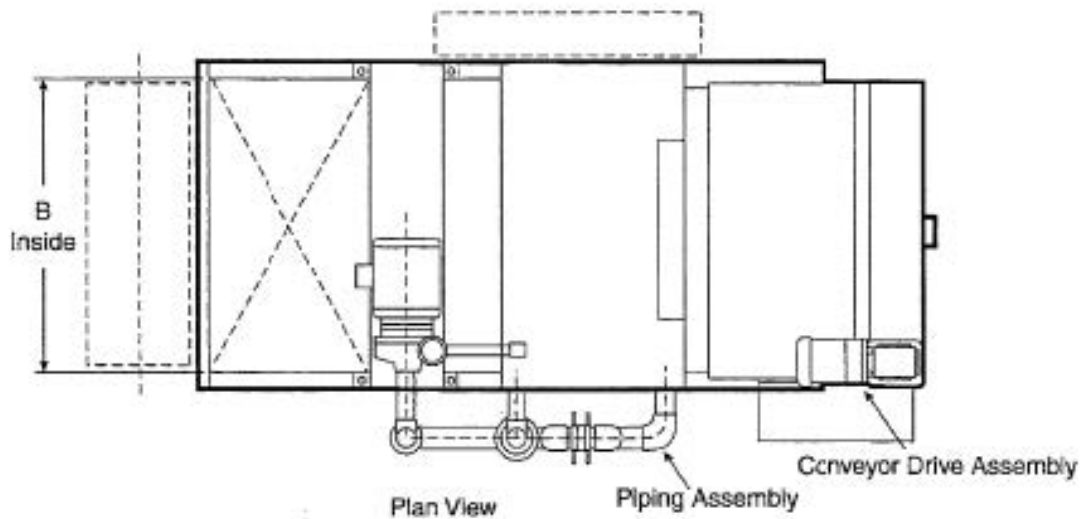

## Applications:

- All grinding applications
- General machining
- Diecast rinse water
- Stamping operations
- Parts washers
- Plastic recycling
- Tube and rolling mills
- Wire drawing



A true performance guarantee ensuring your PRAB equipment achieves the specific results it was designed and manufactured to deliver. And if you need technical support, call us. We are available 24/7.

Contact us to **request a quote** today

5801 East N Avenue, Kalamazoo, MI 49048

Phone: 1-800-968-7722 | Email: sales@prab.com | Website: prab.com

